



MASTER TL5 High Efficiency

MASTER TL5 HE 28W/840 1SL

This TL5 lamp (tube diameter 16 mm) has a high luminous efficacy, resulting in low energy consumption. The High Efficiency TL5 lamp offers excellent lumen maintenance and good color rendering. Application areas are offices, industry, public and governmental buildings, schools, hospitals and indoor sports lighting.

Product data

• General Characteristics

System Description	High Efficiency
Cap-Base	G5
Cap-Base Information	Green Plate
Bulb	T5 [16 mm]
Life to 10% fail	19000 hr
Preheat EL,3h	
Life to 50% fail	24000 hr
Preheat EL,3h	
LSF HF Preheat	99 %
2000h Rated,3h	
LSF HF Preheat	99 %
4000h Rated,3h	
LSF HF Preheat	99 %
6000h Rated,3h	
LSF HF Preheat	99 %
8000h Rated,3h	
LSF HF Preheat	99 %
12000h Rated,3h	
LSF HF Preheat	97 %
16000h Rated,3h	
LSF HF Preheat	84 %
20000h Rated,3h	

• Light Technical Characteristics

Color Code	840 [CCT of 4000K]
Color Rendering Index	80 (min), 82 (nom), 85 (max) Ra8
Color Designation (text)	Cool White
Color Temperature	4000 K
Luminous Flux EL	2625 Lm
25°C, Rated	
Luminous Flux EL	2625 Lm
25°C, Nominal	

Luminous Flux Lamp	2900 Lm
EL 35°C	
Lum Efficacy Rated	94 Lm/W
HF 25°C	
Lum Efficacy Rated	104 Lm/W
HF 35°C	
LLMF HF 2000h	96 %
Rated	
LLMF HF 4000h	95 %
Rated	
LLMF HF 6000h	94 %
Rated	
LLMF HF 8000h	93 %
Rated	
LLMF HF 12000h	92 %
Rated	
LLMF HF 16000h	91 %
Rated	
LLMF HF 20000h	90 %
Rated	
Design Temperature	35 C
Chromaticity Coordinate X	380 -
Chromaticity Coordinate Y	380 -

• Electrical Characteristics

Lamp Wattage	28 W
Lamp Wattage EL	27.9 W
25°C, Rated	
Lamp Wattage EL	28.0 W
25°C, Nominal	
Lamp Wattage EL	27.8 W
35°C	
Lamp Voltage EL	166 V
25°C	



MASTER TL5 High Efficiency

Lamp Voltage EL 35°C	167 V
Lamp Current EL 25°C	0.170 A
Lamp Current EL 35°C	0.170 A
Dimmable	Yes

• Environmental Characteristics

Energy Efficiency Label (EEL)	A+
Mercury (Hg) Content	1.4 mg
Energy consumption kWh/1000h	31 kWh

• Measuring Conditions

Calibration Current	0.170 A
HF Generator Rated Voltage	329 V
Resistor	950 ohm


• Product Dimensions

Base Face to Base Face A	1149.0 (max) mm
Insertion Length B	1153.7 (min), 1156.1 (max) mm
Overall Length C	1163.2 (max) mm
Diameter D	17 (max) mm

• Product Data


Order code	927926584055
Full product code	927926584055
Full product name	MASTER TL5 HE 28W/840 1SL
Order product name	MASTER TL5 HE 28W/840 1SL/40
Pieces per pack	1
Packing configuration	40
Packs per outerbox	40
Bar code on pack - EAN1	8711500639486
Bar code on outerbox - EAN3	8711500867605
Logistic code(s) - 12NC	927926584055
ILCOS code	FDH-28/40/1B-L/P-G5-16/1150
Net weight per piece	105.000 gr

Dimensional drawing

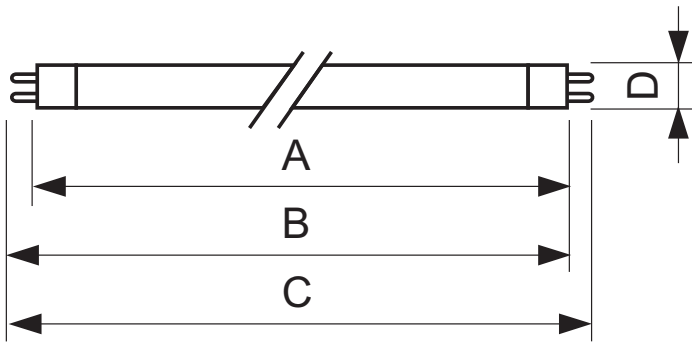



MASTER TL5 HE 28W/840 1SL

Product	A (Max)	B (Min)	B (Max)	C (Max)	D (Max)
TL5 28W/840/GP HE	1149.0	1153.7	1156.1	1163.2	17



G5

Photometric data

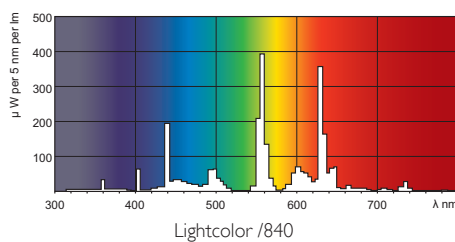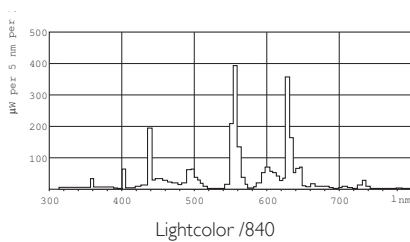



© 2015 Koninklijke Philips N.V. (Royal Philips)
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2015, February 23
data subject to change