



MASTER PL-S 4 Pin

MASTER PL-S 11W/840/4P 1CT

MASTER PL-S is an efficient low-wattage compact fluorescent lamp, typically used for decorative and orientation purposes. The original Philips-invented bridge technology guarantees optimum performance in the application, enabling more light and higher efficacy than the bended technology. The 4-pin version is designed for operation on electronic gear and is provided with a plug-in/pull-out lamp base.

Product data

• General Characteristics

Cap-Base	2G7
Cap-Base Information	4P
Life to 10% fail	8000 hr
Preheat EL,3h	
Life to 10% fail	4500 hr
Nonpreh EL,3h	
Life to 50% fail	13000 hr
Preheat EL,3h	
Life to 50% fail	7000 hr
Nonpreh EL,3h	
LSF HF Preheat	99 %
2000h Rated,3h	
LSF HF Preheat	98 %
4000h Rated,3h	
LSF HF Preheat	97 %
6000h Rated,3h	
LSF HF Preheat	92 %
8000h Rated,3h	
LSF HF Preheat	66 %
12000h Rated,3h	
LSF HF Preheat	30 %
16000h Rated,3h	

• Light Technical Characteristics

Color Code	840 [CCT of 4000K]
Color Rendering Index	82 Ra8
Color Designation (text)	Cool White
Color Temperature	4000 K
Luminous Flux EM 25°C, Rated	900 Lm
Luminous Flux EM 25°C, Nominal	900 Lm

Luminous Flux EL 25°C, Rated	900 Lm
Luminous Flux EL 25°C, Nominal	900 Lm
Lum Efficacy Rated EM 25°C	82 Lm/W
LLMF HF 2000h Rated	95 %
LLMF HF 4000h Rated	92 %
LLMF HF 6000h Rated	90 %
LLMF HF 8000h Rated	88 %
LLMF HF 12000h Rated	86 %
Design Temperature	28 C
Chromaticity Coordinate X	381 -
Chromaticity Coordinate Y	379 -

• Electrical Characteristics

Lamp Wattage	11 W
Lamp Wattage EM 25°C, Nominal	11 W
Lamp Wattage EM 25°C, Rated	11.6 W
Lamp Wattage EL 25°C, Rated	11.0 W
Lamp Wattage EL 25°C, Nominal	11 W
Lamp Voltage EM 25°C	89 V
Lamp Voltage EL 25°C	89 V



MASTER PL-S 4 Pin

Lamp Current EM 25°C	0.160 A
Lamp Current EL 25°C	0.160 A
Dimmable	Yes

• Environmental Characteristics

Energy Efficiency Label (EEL)	A
Mercury (Hg) Content	1.4 mg
Energy consumption kWh/1000h	13 kWh

• Product Dimensions

Base Face to Base Face A	196 (max) mm
Insertion Length B	214 (max) mm
Overall Length C	219.9 (max) mm
Diameter D	28 (max) mm
Diameter D1	13 (max) mm

• Product Data


Order code	927936684011
Full product code	927936684011
Full product name	MASTER PL-S 11W/840/4P 1CT
Order product name	MASTER PL-S 11W/840/4P 1CT/5X10BOX
Pieces per pack	1
Packing configuration	5X10CC
Packs per outerbox	50
Bar code on pack - EAN1	8711500261229
Bar code on intermediate packing - EAN2	8711500261236
Bar code on outerbox - EAN3	8711500261243
Logistic code(s) - 12NC	927936684011
ILCOS code	FSD-11/40/1B-E-2G7
Net weight per piece	41.000 gr

Warnings and Safety

- Lamp light technical and electrical characteristics are influenced by operating conditions, i.e. lamp ambient temperature and operating position as well as applied HF control gear


- Shorter lamp life when often switching and not well pre-heated electrodes

Dimensional drawing

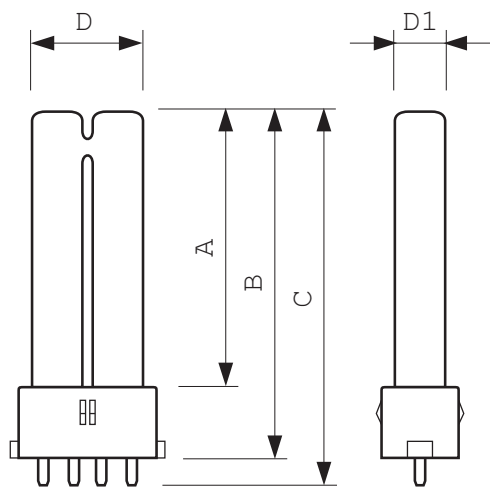


MASTER PL-S 11W/840/4P 1CT

Product	A (Max)	B (Max)	C (Max)	D (Max)	D1 (Max)
PL-S 11W/840/4P LM	196	214	219.9	28	13



2G7

Photometric data

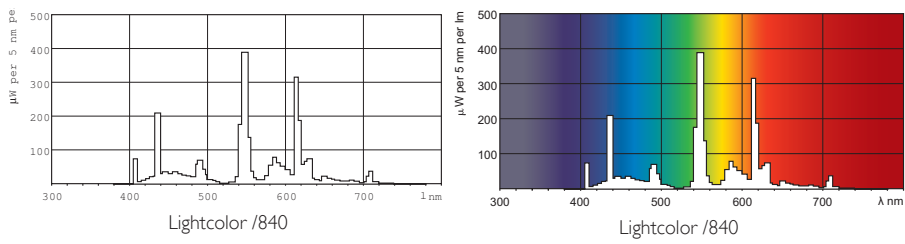

© 2014 Koninklijke Philips N.V. (Royal Philips)
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2014, June 19
data subject to change